

CP3

Multiple entrances & multiple exit car park access control system

SOYAL

Access Control System

Date: 01 May 2009, Revision: V2

Description

Management can clearly define who is allowed to come in at which barrier and at what time. With global anti pass back function among all reader units. Support scheduled auto reset of anti-pass back. Support up to 15,000 cards, 120 holidays and 63 time zones. All user profile is kept in the PC software for ease of maintenance. Each user can be assigned an expiry date (for paid season parking). Support optional "Car park FULL" or "Car park EMPTY" indicator.

During entry or exit, flash the proximity card in front of the reader (installed inside the gooseneck). Upon identity verification, the reader will trigger the barrier gate to open. Reader rejects expired or invalid user.

Ordering Information

Ordering code: CP3 Main System , CP3 Reader Unit

CP3 Reader Unit :


Qty	Equipment
1 pcs	SOYAL AR721HV3 keypad reader
1 pcs	Gooseneck (w/epoxy paint)
1 pcs	SP3 surge protector for power and data line.

CP3 Main System Unit

Qty	Equipment
1 pcs	SOYAL AR716EV2 network controller
1 pcs	SOYAL AR321CM (includes software)
3 pcs	SP3 surge protector for power and data line.
1 pcs	Small PVC box
1 pcs	NOVA300 power supply with backup battery

**** Just purchase 1 main system and as many reader units as necessary for each entrance and exit (max 16 reader units). Each reader unit can be programmed for entrance and exit individually.**

Installation Diagram

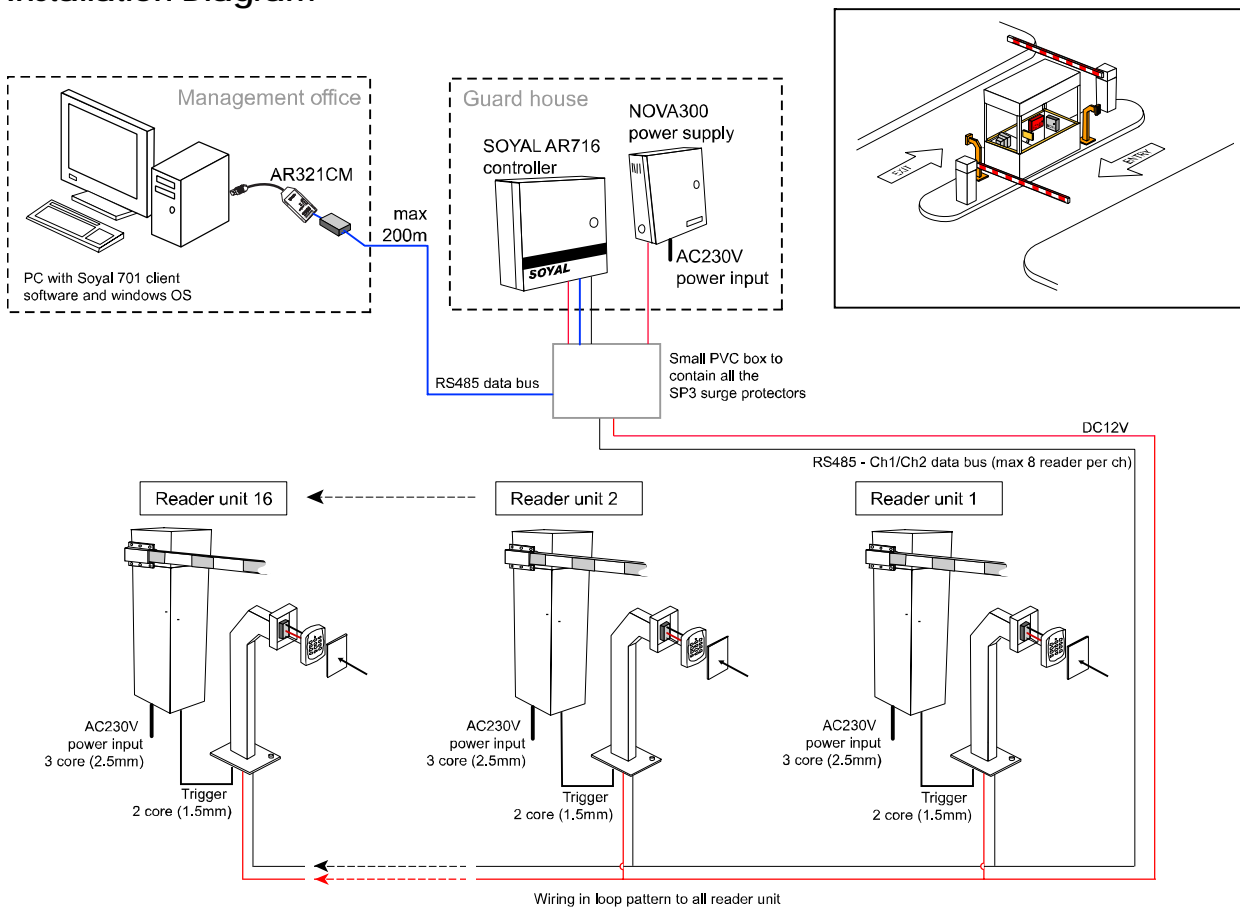

**** Please consult our technical specialist for more information on proper wiring to ensure no data loss over long distance.**

© COPYRIGHT 1st May 2009. This documentation served as a reference only. It is subject to change without further notice. All the diagrams and information in this documentation may not be duplicated or modified in any form without the written approval from the management.